


www.challenger-equipment.co.za %&\$* 'J Yf gU'91 df Ygg'Hf U]`Yf 'A ci bh

Designed and manufactured in South Africa





➤Working Height: 12m

Max horizontal reach: 6m

➤ Basket: 2 man


Tare mass 1&"kg

Basket size: 750mm x 1200mm

Safe working load: 250kg

- Power Source: Diesel motor or petrol motor, deep cycle batteries or 220v plug in
- Controls: Hydraulic top & bottom
- 4x hydraulic stabilizers with leg lock valve
- > 360 degree non-continuous rotation
- Hydraulic operated control valve from both the ground and the cage
- Manual override in the event of system failure
- Aluminium 2 man work basket
- Emengency pump

Robust design with interlocking outriggers, Dead Man controls, overload interlocking and in complete compliance with the South African National Standards 16368.

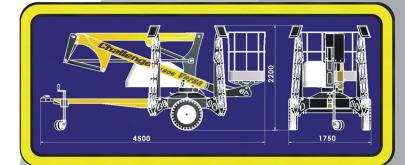

1206 Td5[/\d? ag` f

Key Features

- Integrated base and outrigger system
- Wide outrigger spread for maximum stability
- Simple, ergonomic design for trailers
- Individual stabilizer control valve
- Articulated telescopic configuration
- No plastic mouldings
- Manufactured according to SANS Standards
- Multiple options on baskets
- Additional accessories available on request
- Custom trailer body with sub frame and lights (Optional)

